

CIRCULATION
 C. B. S Nos 2 & 3
 NO MAGNETS

Suppression note added, Dial No. 7, 498 deleted	Pr. 4-37
Tele. connections modified	Pr. 7-33A
Amendments	

CALL OFFICE CIRCUIT.

PLAN No. 5A (POSTPAYMENT WORKING).


N. 1108.

SUPERSEDED BY N 2403 FOR NEW YORK


BOX, COIN COLLECT'NG, No. 16 COMPLETE OR BOX, COIN COLLECTING, No. 16A COMPLETE
 WITH BELL SET No. 29 & TELEPHONE No. 190 MINUS CORD.

13-3-33.

Wiring Diagram for Magneto System.

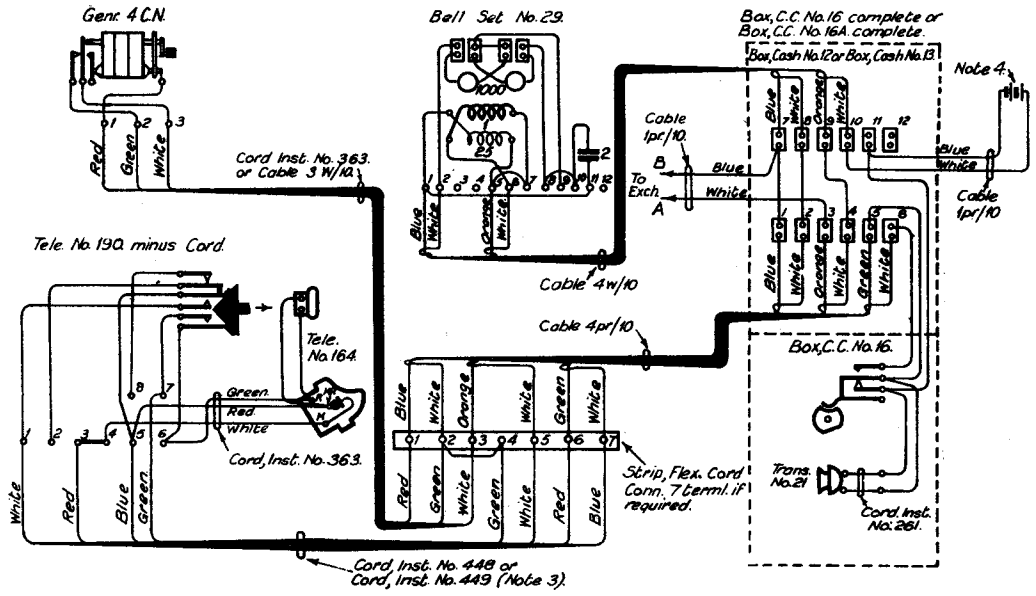

Explanatory Diagram for Magneto System.

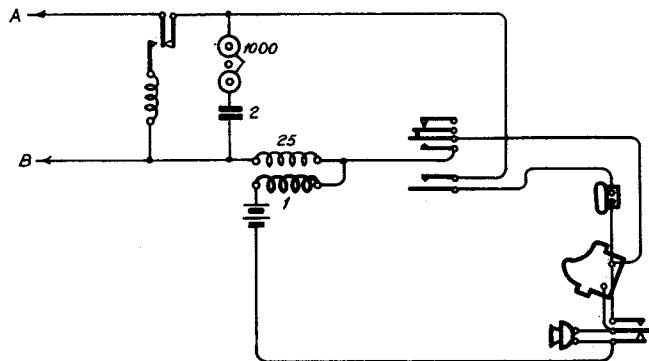

Notes:-

1. Remove strap and connect Extension Bell between terminals 8 and 10 on "Bell Set No. 29" when required.
2. The connections between the strip connection in "Box, Cash No. 12 or No. 13" and the coin box spring assembly on the "Box, Coin Collecting No. 16" should be made locally.
3. When the equipment is fitted in a Kiosk or Cabinet "Cord, Inst. No. 448" should be used. The cord should be passed through a hole in the wallboard immediately behind the "Tele. No. 190 minus Cord" and terminated direct on the Strip connection in the "Box, Cash No. 12 or No. 13." When the "Tele. No. 190 minus Cord" is required to stand on a desk or table (in subscribers premises) a "Cord, Inst. No. 449" should be used and a "Strip, Flex Cord, Conn. 7 term." fitted if necessary.
4. Provide "Cells, Leclanche WK4, WK2 or WK1" according to transmission requirements.
5. A "Backboard for Box, Coin Collecting No. 16A" will be required with "Box, Coin Collecting No. 16A. complete" when the latter is fitted to a desk or table.
6. The mechanical features of the "Box, Coin Collecting No. 16" are shown on Diagram TL 1600 (N1184).