ENGINEERING NOTES

DISTRIBUTION: E; FLO (2); SKY (20); W2. [FOR OFFICIAL USE]

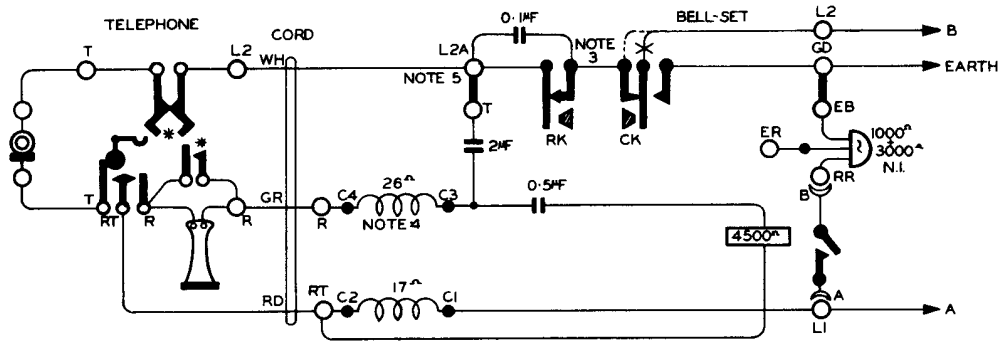

NOTES

1. NORMAL STRAPPING

RINGING CURRENT	LI	L2	RR	GD	EB
−ON B		CLIP A			CLIP B
−ON A	CLIP A				CLIP B
+ON B		CLIP A	CLIP B		
+ON A	CLIP A		CLIP B		

STRAPPING FOR BELL-BOXES WITH REVERSED POLARITY IN DN. AREA

RINGING CURRENT	LI	L2	RR	GD	EB
−ON B		CLIP A	CLIP B		
−ON A	CLIP A		CLIP B		
+ON B		CLIP A			CLIP B
+ON A	CLIP A				CLIP B

C INDUCTION COIL TERMINALS

✱ DIAL SPRINGS

2. WHEN EXTENSION BELL REQUIRED, REMOVE STRAP WHICH WILL BE BETWEEN GD & EITHER EB OR RR & WIRE BIASSED BELL IN ITS PLACE.
3. WHEN BELL-SET IS FOR USE IN 7A2 ROTARY EXCHANGE AREAS, ALTER CONNECTION SHOWN —X— TO THAT SHOWN---- AND MARK 7A2 IN RED PAINT ON BACK OF BELL-SET.
4. THE INDUCTION COIL SHOWN IS Nº 2203A. THE INSET SHOWS DETAILS OF Nº 2237A COIL.
5. THE CONNECTIONS SHOWN ARE FOR UNIFORM IMPULSE WORKING. WHEN IT IS NECESSARY TO CONVERT FROM SHORT & LONG IMPULSE WORKING, REPLACE 4-CONDUCTOR TELEPHONE CORD WITH A 3-CONDUCTOR CORD & STRAP TERMINALS L2A & T.
6. FOR PRINCIPLE OF 4-PARTY LINE SELECTIVE RINGING, SEE C1144.

N.Z. POST OFFICE

15. II. 49

AUTOMATIC BELL-SET, 4-PARTY LINE

W.E.Nº 2660A

SCHEMATIC WITH TELEPHONE H 917

SL.Nº H130

PAGE 1 OF 2

ISSUE 1

TELEPHONES STATIONS C1145

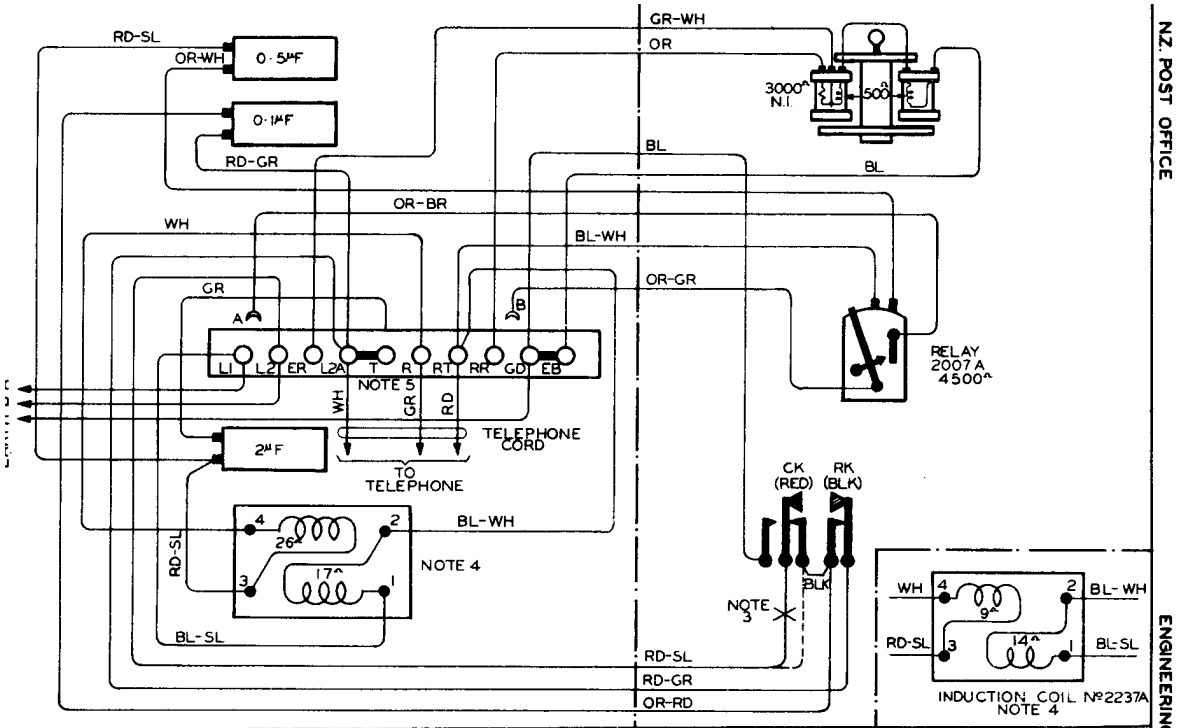

N.Z. POST OFFICE

ENGINEERING NOTES

AUTOMATIC BELL-SET, 4-PARTY LINE

W.E.Nº 2660A

WIRING

S.L.Nº H130

PAGE 2 OF 2

ISSUE 1

TELEPHONES STATIONS C1145