


# TELEPHONE N° 69.

C.B.S. wall set. Various Instruments. Subscribers Wall N.T.  
revised. Wiring diagram.


N 169

CBS 657

7.3.29

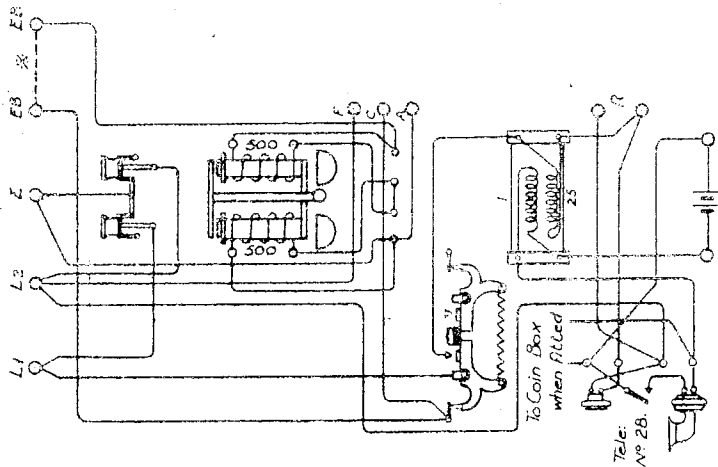

## EXPLANATORY SKETCH.

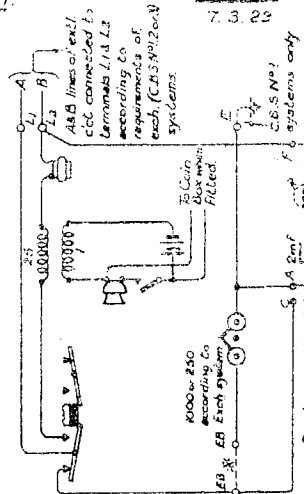

### Notes.

1. Connect A & B wires of external circuit to terminals of L1 & L2 according to requirements of exchange (C.B.S. N° 1, 2 or 3) system.
2. If exchange system is C.B.S. N° 1, join Bell Coils in parallel & connect terminal E to earth. Leave terminals A, C & F disconnected.
3. If exchange system is C.B.S. 2 or 3 connect terminals A & F via a condenser M.C. N° 30 or via a Condenser M.C. N° 30 & a Switch Tumbler N° 1 according to requirements as shown by Plan N° diagrams. Leave terminal C disconnected.
4. If an extension bell is required on any system remove strap \* & connect bell between terminals EB & EB\*.

Condenser M.C. N° 30  
C.B.S. N° 2 or 3 systems only. Switch Tumbler  
N° 1 omitted when not required, see Plan No. dia.




# C.B.S. N<sup>o</sup>s 2 & 3 SYSTEMS.

## EXTENSION WORKING PLAN N<sup>o</sup>1. (INTERNAL ONLY)

**N. 169.**  
Transposed from  
N 1523

MAIN - WALL SET.  
EXTENSION N<sup>o</sup>1- WALL SET.  
EXTENSION N<sup>o</sup>2- WALL SET.

1070

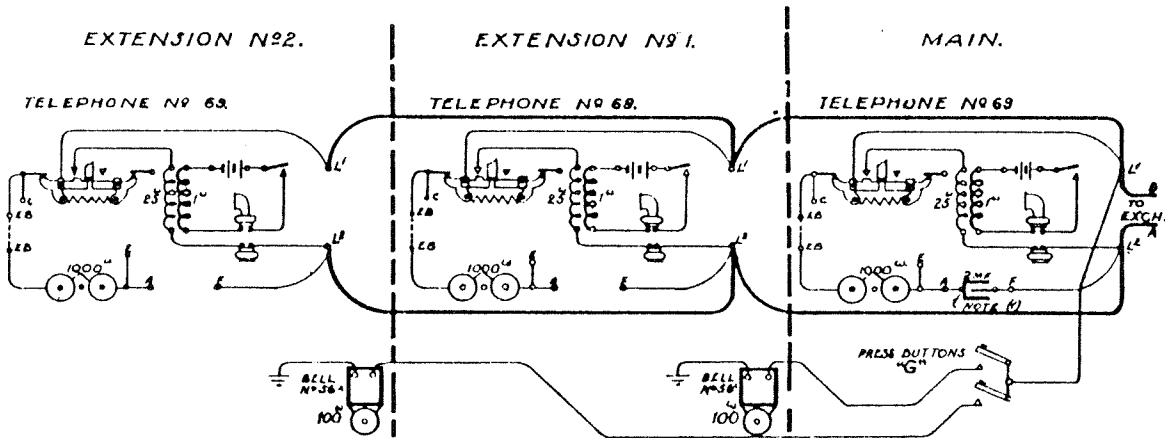

**NOTES**  
(1) "CONDENSER M.C. N<sup>o</sup> 30" TO BE FITTED LOCALLY ON BACKBOARD IN GENERATOR SPACE.

CAR. L<sup>th</sup> P.O. 538